




PIAF 660RC

Compact aerial work platform PIAF 660 RC




PIAF 660RC PICKING



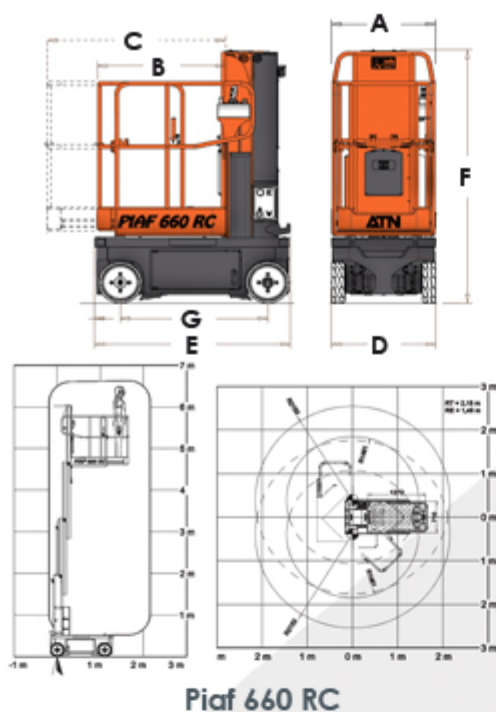

Piaf 660 RC

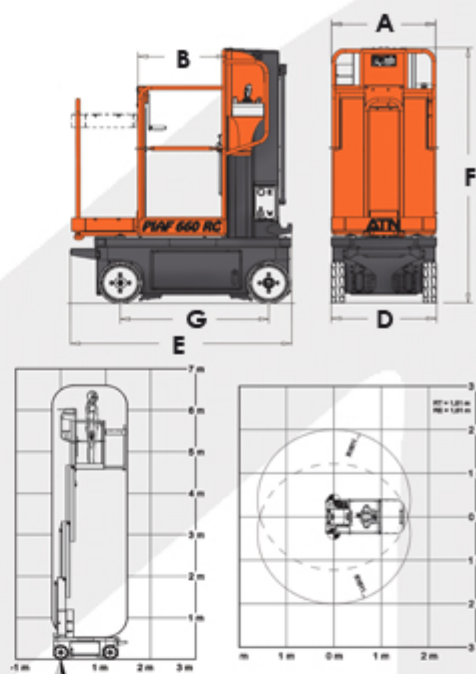

Piaf 660 RC PICKING

PIAF 660RC

ADVANTAGES

- Efficiency thanks to a short turning radius.
- Very compact. A width of less than 0,80 m
- Smooth operating.
- Easy to maintain.
- Designed and manufactured for heavy-duty use.

STANDARD FEATURES

- Non-marking rubber tyres.
- Progressive electro-hydraulic movement controls.
- Travel/direction and elevation controls by joystick.
- Semi-traction battery 24V (4x6V) 185Ah-C5.
- HF 220V battery charger on-board.
- 2 drive speeds.
- Lifting facilities.
- Battery indicator with 80% discharge cut-off.
- Tilt indicator with buzzer.
- Hour meter.
- Flashing light.
- Automatic power cut-off if tilt value > 2°.

OPTIONS

- Centralized battery filling system.
- Motion alarm.
- Gel batteries.
- HF 110V A battery charger.
- 220V AC power to platform.
- Painted customer colour (s).

	PIAF 660RC	PIAF 660RC PICKING
Working height	6,60 M (22 ft. 66 in.)	6,60 M (21 ft. 66 in.)
Platform height	4,60 M (15 ft. 10 in.)	4,60 M (15 ft. 10 in.)
Horizontal reach	0,36 M (1 ft. 18 in.)	- (-)
E Overall length	1,46 M (4 ft. 79 in.)	1,64 M (5 ft. 38 in.)
D Overall width	0,78 M (2 ft. 55 in.)	0,78 M (2 ft. 55 in.)
C Length with platform extensions	1,33 M (4 ft. 36 in.)	- (-)
Lift capacity (200kg, no wind)	1 pers + 120 Kg (1 pers + 265 lbs.)	1 pers + 40kg TAB. + 80 Kg (88 lbs. TAB. 176 lbs.)
A Platform width	0,77 M (2 ft. 52 in.)	0,77 M (2 ft. 52 in.)
B Platform length	0,96 M (3 ft. 15 in.)	0,66 M (3 ft. 15 in.)
G Wheelbase	1,10 M (3 ft. 61 in.)	1,10 M (3 ft. 61 in.)
F Height - stowed	1,99 M (6 ft. 53 in.)	1,99 M (6 ft. 53 in.)
Drive speed - stowed	3,6 Km/h (2,23 Mph)	3,6 Km/h (2,23 Mph)
Drive speed - raised	1 Km/h (0,62 Mph)	1 Km/h (0,62 Mph)
Maximum tilt value	2 ° (2 °)	2 ° (2 °)
Weight	980 Kg (2160 in.)	980 Kg (2160 lbs.)
Gradeability * - stowed	25 % (25 in.)	25 % (25 %)
Max.ground bearing pressure	471 Kn/m ²	471 Kn/m ²

CE This product complies with European regulations in force (EN 280). Due to our constant improvement policy, ATN reserves the right to make any modifications without any prior notice.



Rue André Thevet,
Z.I.Guillaume Mon Amy Fauillet 47400 FRANCE
+33 (0) 553 798 320 +33 (0) 553 880 107
<http://www.atnplatforms.com>

